



LECTURE 02 : **ELEMENTS OF COMMUNICATION SYSTEM**

Prof. Dr. Qaysar Salih Mahdy
Communication Systems **ME 229/A**

Fall Semester : Retake Course 2023-2024

Week 2

Date : 10/10/2023



Communication Systems Overview L&D

Chapter 1

Information representation

Communication system block diagrams

Analog versus digital systems

Performance metrics

Data rate limits

Next week: signals and signal space (L&D
chapter 2)

Based on Notes from John Gill

Types of Information

- ▶ Major classification of data: analog vs. digital
- ▶ Analog signals
 - ▶ speech (but words are discrete)
 - ▶ music (closer to a continuous signal)
 - ▶ temperature readings, barometric pressure, wind speed
 - ▶ images stored on film
- ▶ Analog signals can be represented (approximately) using bits
 - ▶ digitized images (can be compressed using JPEG)
 - ▶ digitized video (can be compressed to MPEG)
- ▶ Bits: text, computer data
- ▶ Analog signals can be converted into bits by quantizing/digitizing

The word "bit" was coined in the late 1940s by John Tukey

Analog Messages


- ▶ Early analog communication
 - ▶ telephone (1876)
 - ▶ phonograph (1877)
 - ▶ film soundtrack (1923, Lee De Forest, Joseph Tykociński-Tykociner)
- ▶ Key to analog communication is the amplifier (1908, Lee De Forest, triode vacuum tube)
- ▶ Broadcast radio (AM, FM) is still analog
- ▶ Broadcast television was analog until 2009

Digital Messages




- ▶ Early long-distance communication was digital
 - ▶ semaphores, white flag, smoke signals, bugle calls, telegraph
- ▶ Teletypewriters (stock quotations)
 - ▶ Baudot (1874) created 5-unit code for alphabet. Today *baud* is a unit meaning one *symbol* per second.
 - ▶ Working teleprinters were in service by 1924 at 65 words per minute
- ▶ Fax machines: Group 3 (voice lines) and Group 4 (ISDN)
 - ▶ In 1990s they accounted for majority of transPacific telephone use. Sadly, fax machines are still in use.
 - ▶ First fax machine was Alexander Bain 1843 device required conductive ink
 - ▶ Pantelegraph (Caselli, 1865) set up telefax between Paris and Lyon
- ▶ Ethernet, Internet

Communication System Block Diagram (Basic)

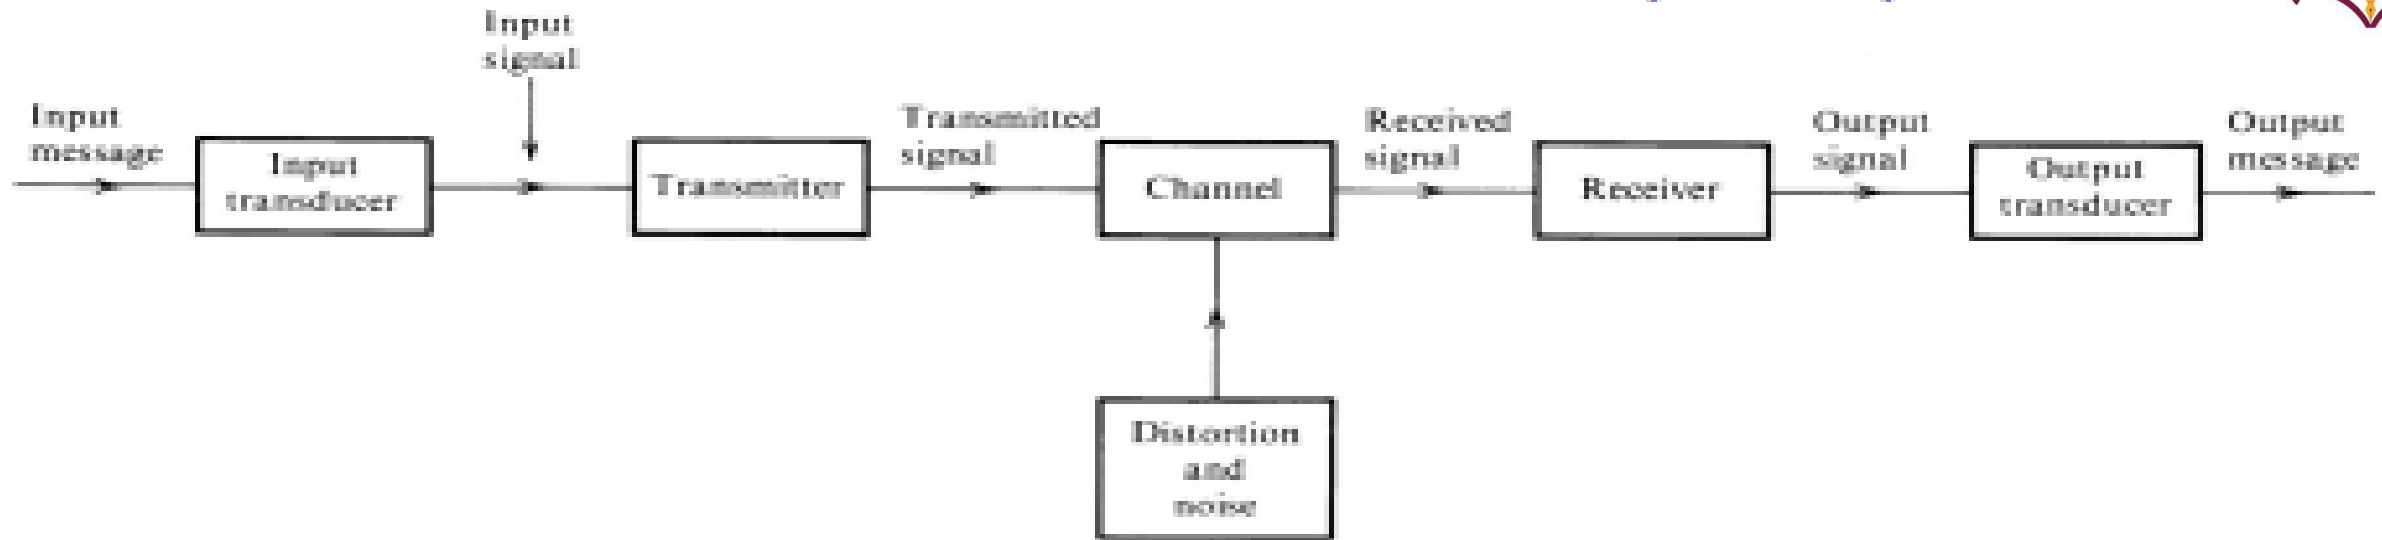

- ▶ Source encoder converts message into message signal (bits)
- ▶ Transmitter converts message signal into format appropriate for channel transmission (analog/digital signal)
- ▶ Channel conveys signal but may introduce attenuation, distortion, noise, interference
- ▶ Receiver decodes received signal back to message signal
- ▶ Source decoder decodes message signal back into original message

Communication System Block Diagram (Advanced)

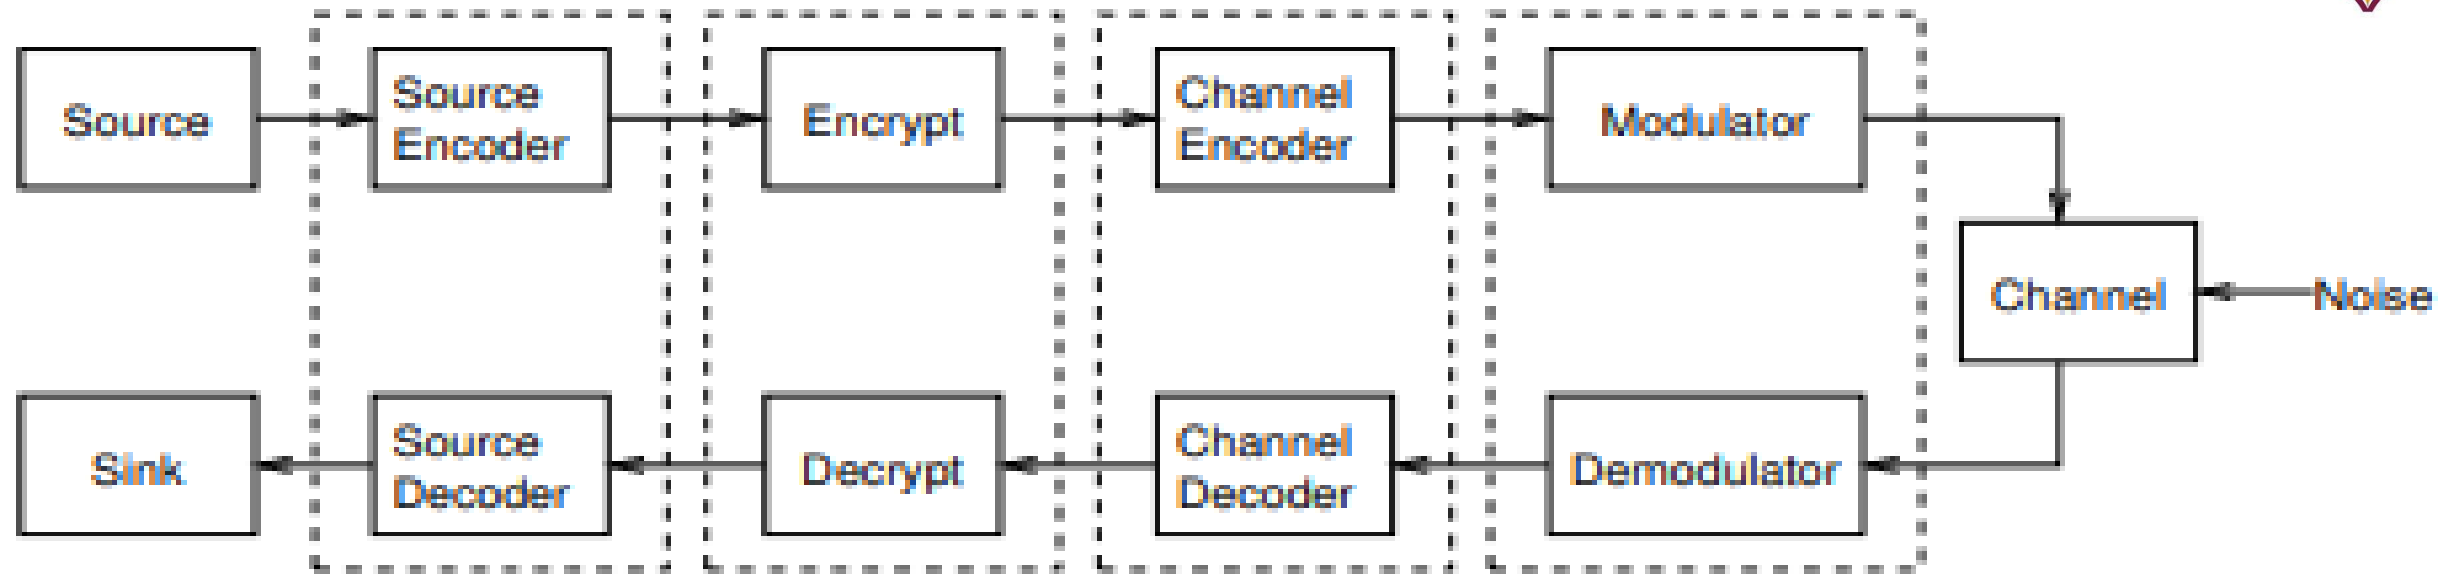

- ▶ Source encoder compresses message to remove redundancy
- ▶ Encryption protects against eavesdroppers and false messages
- ▶ Channel encoder adds redundancy for error protection
- ▶ Modulator converts digital inputs to signals suitable for physical channel

Examples of Communication Channels




- ▶ Communication systems convert information into a format appropriate for the transmission medium
- ▶ Some channels convey electromagnetic waves (signals).
 - ▶ Radio (20 KHz to 20+ GHz)
 - ▶ Optical fiber (200 THz or 1550 nm)
 - ▶ Laser line-of-sight (e.g., from Mars)
- ▶ Other channels use sound, smell, pressure, chemical reactions
 - ▶ smell: ants
 - ▶ chemical reactions: neuron dendrites
 - ▶ dance: bees
- ▶ Analog communication systems convert (modulate) analog signals into modulated (analog) signals
- ▶ Digital communication systems convert information in the form of bits into binary/digital signals

Physical Channels


- ▶ Physical channels have constraints on what kinds of signals can be transmitted
 - ▶ Radio uses E&M waves at various frequencies
 - ▶ Submarine communication at about 20 KHz
 - ▶ Cordless telephones: 45 MHz, 900 MHz, 2.4 GHz, 5.8 GHz, 1.9 GHz
- ▶ Wired links may require DC balanced codes to prevent voltage build up
- ▶ Fiber optic channels use 4B5B modulation to accommodate time-varying attenuation
- ▶ CD and DVD media require minimum spot size but position can be more precise
- ▶ The process of creating a signal suitable for transmission is called *modulation* (modulate from Latin to regulate)

AM and FM Modulation


(a) Carrier

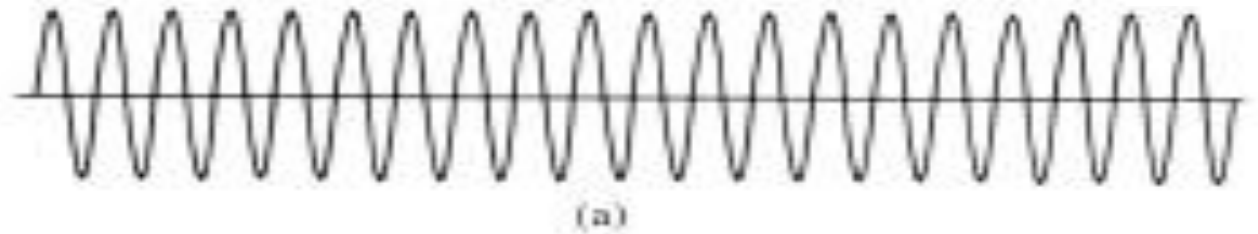


(b) Signal

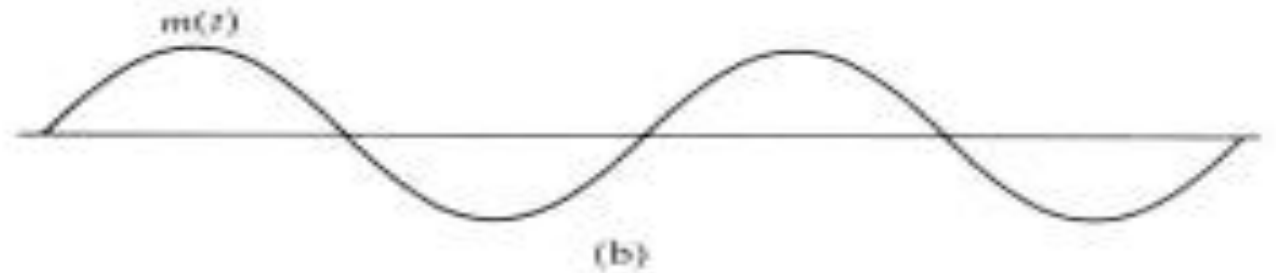

(c) Amplitude modulated

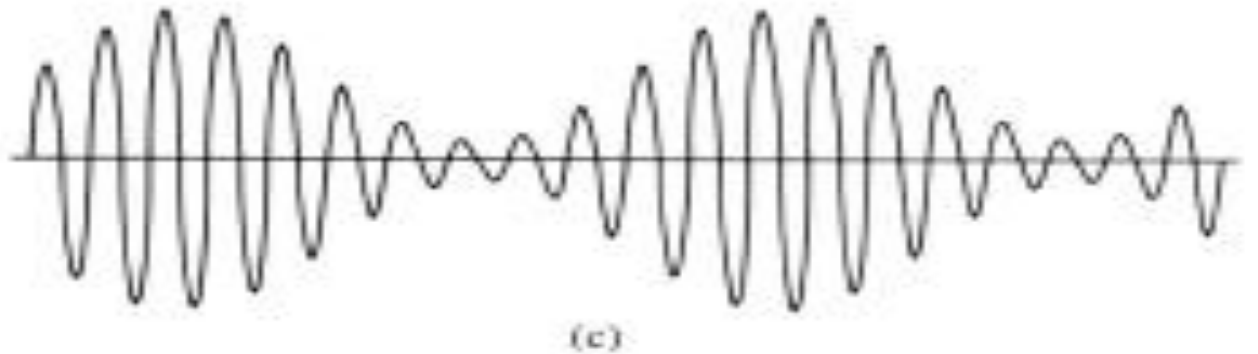




(d) Frequency modulated

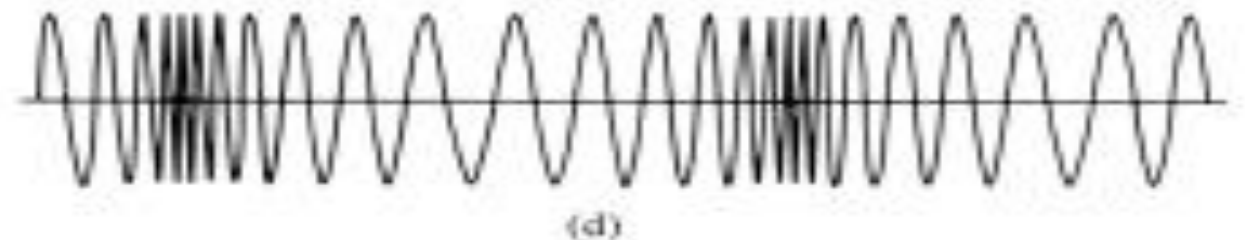

Analog vs. Digital Systems



- ▶ Analog signals
Values varies continuously
- ▶ Digital signals
Value limited to a finite set
Digital systems are more robust
- ▶ Binary signals
Have 2 possible values
Used to represent bit values
Bit time T needed to send 1 bit
Data rate $R = 1/T$ bits per second

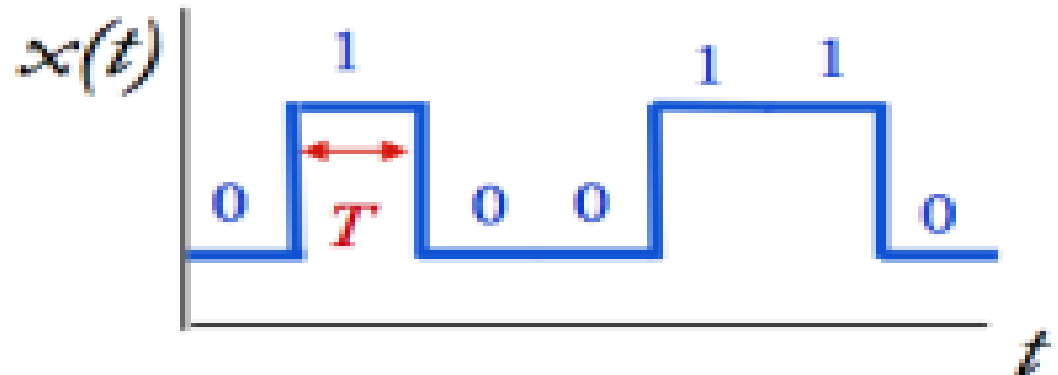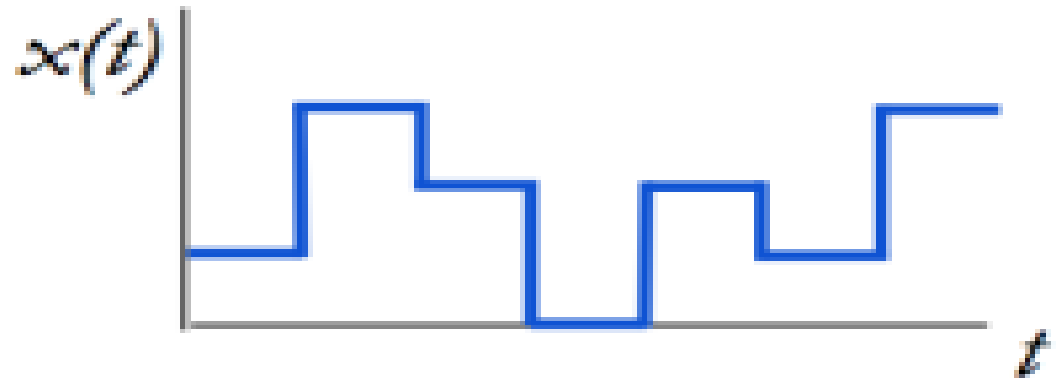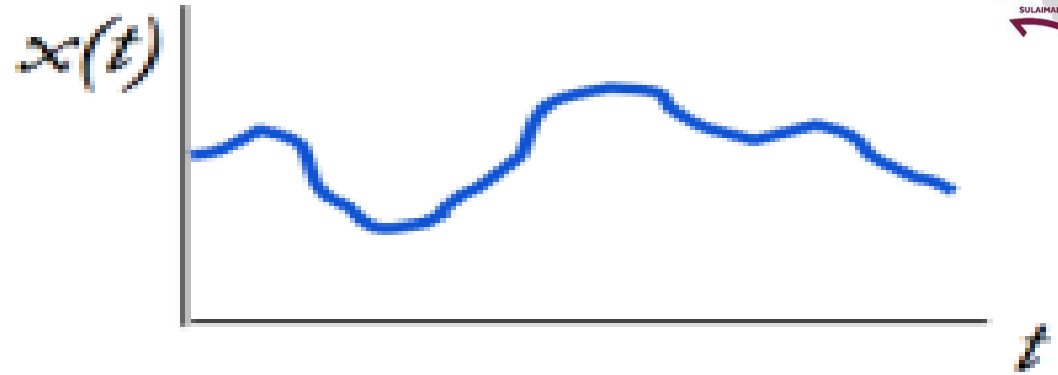

Performance Metrics

- ▶ Analog communication systems

- ▶ Metric is *fidelity*, closeness to original signal
- ▶ We want $\hat{m}(t) \approx m(t)$
- ▶ A common measure of infidelity is energy of difference signal:

$$\int_0^T |\hat{m}(t) - m(t)|^2 dt$$

- ▶ Digital communication systems

- ▶ Metrics are data rate R in bits/sec and probability of bit error $P_e = P\{\hat{b} \neq b\}$
- ▶ Without noise, never make bit errors
- ▶ With noise, P_e depends on signal and noise power, data rate, and channel characteristics.

Data Rate Limits



- ▶ Data rate R is limited by signal power, noise power, distortion
- ▶ Without distortion or noise, we could transmit at $R = \infty$ and error probably $P_e = 0$
- ▶ The Shannon *capacity* is the maximum possible data rate for a system with noise and distortion
 - ▶ This maximum rate can be approached with bit probability close to 0
 - ▶ For additive white Gaussian noise (AWGN) channels,

$$C = B \log_2(1 + \text{SNR})$$

- ▶ The theoretical result does not tell how to design real systems
- ▶ Shannon obtained $C = 32$ Kbps for telephone channels
- ▶ Get higher rates with modems/DSL (use much more bandwidth)
- ▶ Nowhere near capacity in wireless systems

Next week

Fourier series and Fourier transforms in $2\pi f$

Vector space perspective of signal processing

L&D Chapter 2 (skim this, most of this should look very familiar)