

MySQL Integrity Constraints

(LAB Lecture)



Department of Information Technology
Database Systems II (IT226)
Spring 2024-2025
Week 3 – February 23, 2025
Lecturer: Soma Soleimanzadeh



1


Contents

- MySQL Integrity Constraints
- Alter Table
 - Add a Constraint in CREATE TABLE
 - Add a Constraint in ALTER TABLE

2

ALTER TABLE for Adding/Dropping Constraints

- **Integrity Constraints** are **rules** to ensure that the data in the database is accurate, consistent and reliable.
- Two ways to specify constraints:
 - while creating a table in **CREATE TABLE**
 - after table creation in **ALTER TABLE**

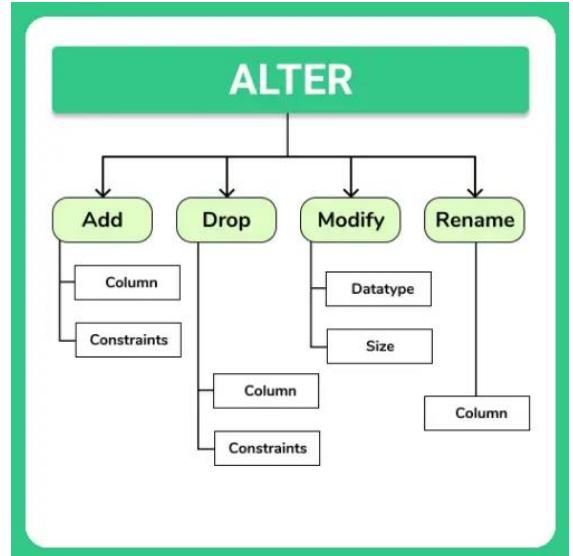

Most Common MySQL Constraints

- **NOT NULL**
- **AUTO_INCREMENT**
- **UNIQUE**
- **CHECK**
- **DEFAULT**
- **PRIMARY KEY**
- **FOREIGN KEY**

Let's Try Specifying Some Constraints

- In the next slides, we will follow to scenarios to practice specifying integrity constraints in tables:
 - ❖ **Scenario 1** – Creating a table and specifying constraints in **CREATE TABLE** Statement.
 - ❖ **Scenario 2** – Creating a table without any constraints except for primary key, then adding constraints in **ALTER TABLE** Statement.

5

Scenario 1 – Adding Constraints in CREATE TABLE

Create the following table, considering all mentioned constraints in **CREATE TABLE** Command.

Employee	EID	Ename	Degree	Email	Salary
	1	John	Master	john@gmail.com	3000
	2	Peter	PhD	peter@gmail.com	4000

AUTO_INCREMENT

Default value is 'Bachelor'

NOT NULL

• NOT NULL

• UNIQUE

Salary values must be between 0 and 5000

6

Scenario 1 – CREATE TABLE

```
create table employee
(EID int auto_increment,
EName varchar(50) NOT NULL,
Degree enum('Bachelor','Master','PhD') default 'Bachelor',
Email varchar(60) UNIQUE NOT NULL,
Salary int check(Salary>=0 and Salary<=5000),
primary key(EID));
```

7

Scenario 1 – Inserting Some Data into Table

General Syntax of Inserting Data into a Table:

INSERT INTO table_name(column_names) **VALUES** (values_for_columns)

<u>EID</u>	Ename	Degree	Email	Salary

Insert into employee(Ename, Degree, Email, Salary)
Values (Null, 'Master', 'karez@gmail.com', 3000);



Error! → Because **NOT NULL** constraint of **Ename** is violated.

8

Scenario 1 – Inserting Some Data into Table

<u>EID</u>	Ename	Degree	Email	Salary
1	Ahmed	Bachelor	ahmed@gmail.com	4000

Insert into employee(Ename, Email, Salary)

Values ('Ahmed', 'ahmed@gmail.com', 4000);



The **Degree** value is not specified. Because the **Degree** column has **Default** constraint, it sets to the default value (**Bachelor**).

9

Scenario 1 – Inserting Some Data into Table

<u>EID</u>	Ename	Degree	Email	Salary
1	Ahmed	Bachelor	ahmed@gmail.com	4000

Insert into employee(Ename, Degree, Email, Salary)

Values ('Sara', 'PhD', 'ahmed@gmail.com', 3500);



Error! → Because **UNIQUE** constraint of the **Degree** column is violated that says repeated values are not allowed in **Email**.

Insert into employee(Ename, Degree, Email, Salary)

Values ('Didar', 'Bachelor', 'didar@gmail.com', 7000);



Error! → Because **CHECK** constraint of Salary column is violated that says Salary must be between 0 and 5000.

Scenario 2 – Adding Constraints in ALTER TABLE

1. Create the following table, without specifying any constraints, except for primary key.

EmployeeV2

EID	Ename	Degree	Email	Salary
1	John	Master	john@gmail.com	3000
2	Peter	PhD	peter@gmail.com	4000

2. After the table was created, use **ALTER TABLE** to add the following constraints:

AUTO_INCREMENT	NOT NULL	Default value is 'Bachelor'	• NOT NULL • UNIQUE	Salary values must be between 0 and 5000	
EmployeeV2	EID	Ename	Degree	Email	Salary
	1	John	Master	john@gmail.com	3000
	2	Peter	PhD	peter@gmail.com	4000

Scenario 2 – CREATE TABLE without Constraints

```
create table employeeV2
(EID int,
EName varchar(50),
Degree enum('Bachelor','Master','PhD'),
Email varchar(60),
Salary int,
primary key(EID));
```

Scenario 2 – Adding Constraints in ALTER TABLE

```
alter table employeeV2
modify EID int auto_increment;

alter table employeeV2
modify EName varchar(50) NOT NULL;

alter table employeeV2
alter Degree set default 'Bachelor';
```

```
alter table employeeV2
modify Email varchar(60) NOT NULL;

alter table employeeV2
add unique(Email);

alter table employeeV2
add check(Salary>=0 and Salary<=5000);
```

13

Scenario 2 – Inserting Some Data into Table

- You can test all constraints by entering data into the **employeeV2** table, similar to entering data into the **employee** table in scenario 1.
- The results you get are the same for both scenarios. It means that even if we forget to add a constraint to a column in the CREATE TABLE, we can add it later in the ALTER TABLE command.

14